CHR-14150A/B *12V / 15 Amp*

CHR-26180A/B *24V / 7.5 Amp*

Monicon
Instruments Co., Ltd

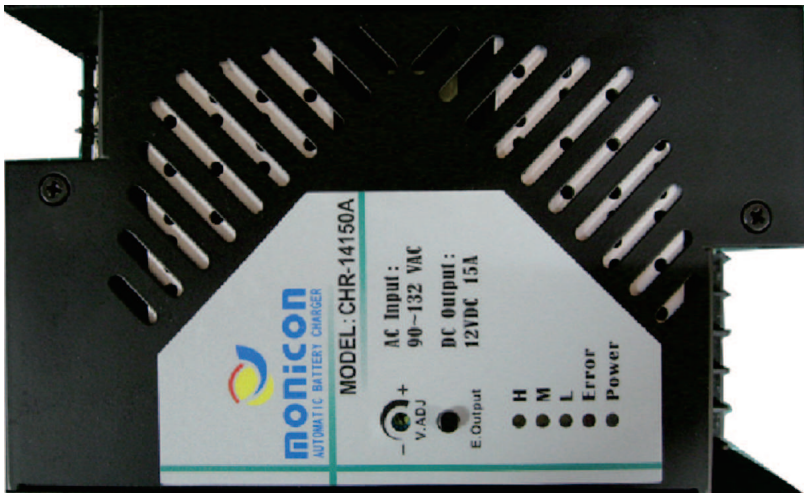

Features

- The CHR-14150 and CHR-26180 are designed using float charging technology to improve Charging efficiency and extends the life of the battery.
- Short circuit and reverse polarity protection
- Low voltage charging for discharged battery
- Protection against reverse current discharging
- LED indication of charging status
- Panel mount design for easy installation
- Compact size and light weight design

specifications

- AC input voltage：90~132(A) or 187~ 253(B) VAC
- Frquency：50/60 Hz
- DC Rated output power：15A @ 12 V(*7.5A@24V)
- Efficiency greater than 75% at full load
- Output voltage： Float mode 13.6V (*26.6V)
- Working Temperature：-20°C～60°C
- Minimum Charging Voltage: 4.5V (*14V)
- Dimensions：174 mm x104 mm x62 mm
- Charging mode ： Float
- Weight：1.3 kg

* This specification applies to CHR-26180 model
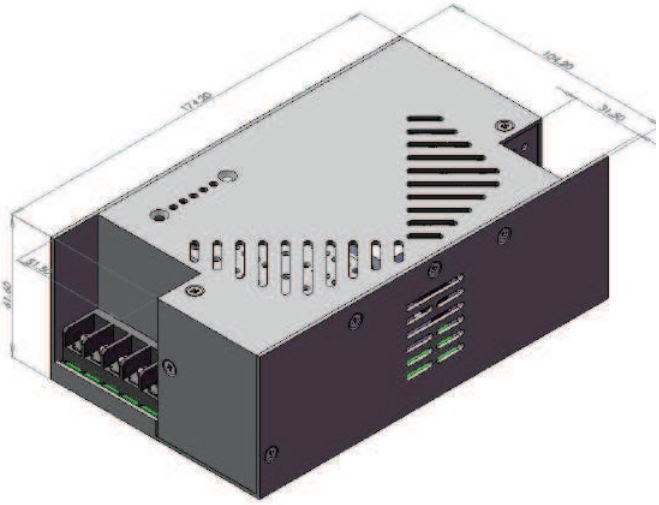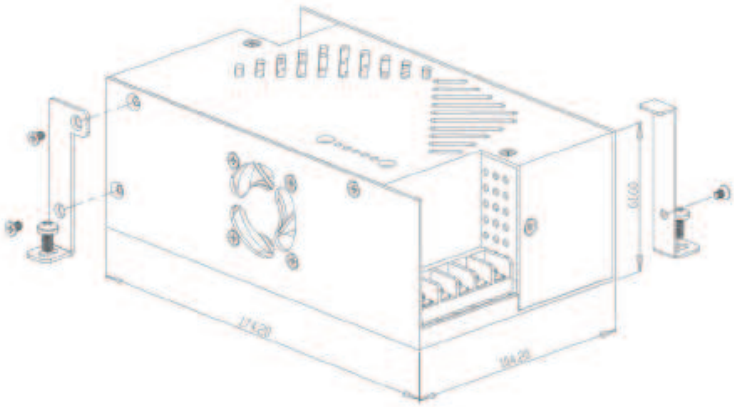
Dimensions